

# HP LaserJet Enterprise M605 Series\*



**A powerhouse printer loaded with manageability, energy savings, and mobile printing features.<sup>2</sup>**

Accelerate business results with outstanding print quality. Tackle large jobs and equip workgroups for success wherever business leads.<sup>2</sup> Easily manage and expand this impressively fast, versatile printer—and help reduce environmental impact.



HP LaserJet Enterprise M605n



HP LaserJet Enterprise M605dn



HP LaserJet Enterprise M605x

## Take productivity to the next level

- Equip users to fly through tasks with the intuitive 4.3-inch (10.9 cm) colour touchscreen and PIN printing.
- Meet high-volume demands with automatic two-sided printing and versatile paper trays—up to 3,600 sheets.<sup>3</sup>
- Improve efficiency. Add paper-handling accessories to presort jobs, print on different media, and more.<sup>4</sup>
- Print uninterrupted for longer periods of time with high-yield Original HP LaserJet cartridges.<sup>5</sup>

## Meet business needs in the office and beyond

- Enable wireless direct printing in the office—from mobile devices—without accessing the network.<sup>6</sup>
- Print with just a touch of your NFC-enabled mobile device to this printer—no network needed.<sup>7</sup>
- Extend your printing reach. Easily share printing resources on a network with Ethernet connectivity.

## Advanced capabilities, easy management

- Easily expand this printer as solutions advance and workgroup needs grow, with add-on, updatable features.
- Protect sensitive data—at rest or in transit—with a variety of embedded and optional security solutions.<sup>9</sup>
- Easily take command of your printing environment from one central location—with HP Web Jetadmin.<sup>10</sup>
- Quickly troubleshoot problems using cloud-based help services that are relevant and up to date.<sup>11</sup>

## Less energy, more efficiency and savings


- Save energy—HP Auto-On/Auto-Off Technology turns your printer on when you need it and off when you don't.<sup>12</sup>
- Conserve resources—this printer has lower typical electricity consumption than any device in its class.<sup>8</sup>
- Help save time and money with lightweight HP EcoFFICIENT paper—engineered for clean, trouble-free printing.
- Help reduce your impact. Count on easy, free cartridge recycling through HP Planet Partners.<sup>1</sup>
- Protect your investment with HP Care Pack. Let our HP certified engineers resolve all your technical issues.<sup>13</sup>

\*SKUs availability may vary by country. <sup>1</sup> Program availability varies. Original HP cartridge return and recycling is currently available in more than 49 countries, territories, and regions in Asia, Europe, and North and South America through the HP Planet Partners program. For more information, visit [hp.com/recycle](http://hp.com/recycle). <sup>2</sup> Local printing requires mobile device and printer be on the same network or have a direct wireless connection. Wireless performance is dependent on physical environment and distance from access point. Wireless operations are compatible with 2.4 GHz operations only. Remote printing requires an Internet connection to an HP web-connected printer. App or software and HP ePrint account registration may also be required. Wireless broadband use requires separately purchased service contract for mobile devices. Check with service provider for coverage and availability in your area. See [hp.com/go/mobileprinting](http://hp.com/go/mobileprinting) for more details. <sup>3</sup> 3,600-sheet input capacity requires purchase of additional accessories. <sup>4</sup> Optional paper-handling accessories must be purchased separately. <sup>5</sup> The optional high-yield Original HP LaserJet cartridge must be purchased separately. <sup>6</sup> Feature is available only on the HP LaserJet Enterprise M605x. Mobile device needs to be connected directly to the WiFi signal of a wireless direct-capable multi-function printer (MFP) or printer prior to printing. Depending on mobile device, an app or driver may also be required. Wireless performance is dependent on physical environment and distance from the access point in the MFP or printer. For details, see [hp.com/go/mobileprinting](http://hp.com/go/mobileprinting). <sup>7</sup> Feature is available only on the HP LaserJet Enterprise M605x. Mobile device must support NFC-enabled printing. For more information, see [hp.com/go/mobileprinting](http://hp.com/go/mobileprinting). <sup>8</sup> Based on HP testing using the ENERGY STAR® program's Typical Electricity Consumption (TEC) method or as reported in [energystar.gov](http://energystar.gov) vs. competitive single-function black-and-white laser printers with print speeds between 56 and 70 pages per minute (ppm) as of November 2014. Actual results may vary. <sup>9</sup> Some solutions require download or additional purchase. Learn more at [hp.com/go/printingsolutions](http://hp.com/go/printingsolutions). The encrypted hard disk drive (HDD) requires an additional purchase. <sup>10</sup> Universal device plug-in is offered with HP Web Jetadmin 10.3 SR4 and higher. HP Web Jetadmin is free and available for download at [hp.com/go/webjetadmin](http://hp.com/go/webjetadmin). <sup>11</sup> Online help must be enabled on the printer or MFP. Mobile device must have an Internet connection to access online services. <sup>12</sup> HP Auto-On/Auto-Off Technology capabilities are subject to printer and settings. <sup>13</sup> For more details on HP Care Pack, go to [hp.com/go/cpc](http://hp.com/go/cpc)

## Product walkaround

- 1 Intuitive 10.9 cm (4.3-inch) colour touchscreen tilts up for easier viewing
- 2 600-sheet output bin
- 3 Top cover (access to the toner cartridge)
- 4 100-sheet multipurpose tray 1
- 5 500-sheet input tray 2
- 6 500-sheet input tray 3
- 7 Hardware Integration Pocket (HIP)
- 8 Easy-access USB port
- 9 Convenient front on/off button
- 10 Output accessory cover
- 11 512 MB standard memory (upgradeable to 1.5 GB) and a 1.2 GHz processor
- 12 Access port for optional Kensington-style lock
- 13 Local area network (LAN) Ethernet (RJ-45) network port
- 14 Hi-speed USB 2.0 printing port
- 15 Hi-speed USB 2.0 port for connecting external USB devices
- 16 Power connection
- 17 Built-in automatic two-sided printing

HP LaserJet Enterprise M605x shown

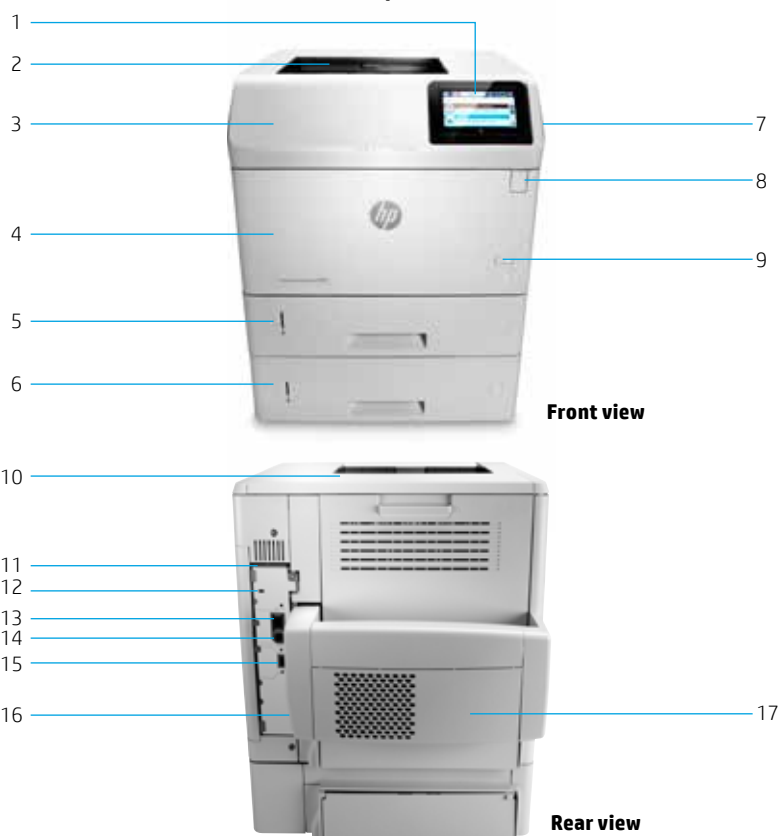

## Series at a glance



Model	M605n	M605dn	M605x
<b>Product number</b>	E6B69A	E6B70A	E6B71A
<b>Print speed in ppm, A4<sup>2</sup></b>	Up to 55	Up to 55	Up to 55
<b>Control panel</b>	4-line LCD with keypad	4-line LCD with keypad	10.9 cm (4.3-inch) colour touchscreen
<b>100-sheet multipurpose tray and 500-sheet tray 2</b>	✓	✓	✓
<b>500-sheet tray 3</b>	Optional	Optional	✓
<b>Up to three 1 x 500-sheet input trays and one 1,500-sheet high-capacity input tray<sup>1</sup></b>	Optional (up to a maximum of 6 trays total)	Optional (up to a maximum of 6 trays total)	Optional (up to a maximum of 6 trays total)
<b>Touch-to-print<sup>3</sup> and wireless direct<sup>4</sup> mobile printing</b>	Optional	Optional	✓
<b>HP High-Performance Secure Hard Disk</b>	Optional	Optional	Optional
<b>Automatic duplexer</b>	Optional	✓	✓
<b>Support for high-capacity toner cartridge</b>	✓	✓	✓
<b>ENERGY STAR<sup>®</sup> certified</b>	Not available	✓	✓

<sup>1</sup> 3,600-sheet input capacity requires purchase of additional accessories, up to a maximum of 6 trays total for up to 3,600-sheet input capacity. To insure product stability, it is a requirement to purchase the HP LaserJet Printer Stand (F2G70A) when using M605 Printers with more than three HP LaserJet 500-sheet Input Tray Feeders (F2G68A), or with one HP LaserJet 1,500-sheet Input Tray (F2G73A) and more than one HP LaserJet 500-sheet Input Tray Feeder (F2G68A). <sup>2</sup> Printing speed measured using ISO/IEC 24734 and excludes first set of test documents. For more information, see [hp.com/go/printerclaims](http://hp.com/go/printerclaims). Exact speed varies depending on the system configuration, software application, driver, and document complexity. Print speeds are up to 55 ppm, A4 (58 ppm, letter) for the HP LaserJet Enterprise M605 series. <sup>3</sup> Touch-to-print capability is standard on the HP LaserJet Enterprise M605x only. Requires purchase of optional HP Jetdirect 3000w near field communications (NFC)/Wireless Accessory, available Fall 2015, for the HP LaserJet Enterprise M605n and M605dn. Mobile device must support NFC-enabled printing. For more information, see [hp.com/go/mobileprinting](http://hp.com/go/mobileprinting). <sup>4</sup> Wireless direct printing is standard on the HP LaserJet Enterprise M605x only. Requires purchase of optional HP Jetdirect 3000w near field communications (NFC)/Wireless Accessory, available Fall 2015, for the HP LaserJet Enterprise M605n and M605dn. Mobile device needs to be connected directly to the Wi-Fi signal of a wireless direct-capable multifunction printer (MFP) or printer prior to printing. Depending on mobile device, an app or driver may also be required. Wireless performance is dependent on physical environment and distance from the access point in the MFP or printer. For details, see [hp.com/go/businessmobileprinting](http://hp.com/go/businessmobileprinting)

## HP Services

Downtime can have serious consequences, so HP provides support beyond the standard warranty. You benefit from reduced risk, maximized uptime, predictable service delivery and no unbudgeted repair costs.

Choose from:

**Optimized Care (optimum performance and stability):** 4 hour Onsite Support, Maintenance Kit Replacement Service, Installation with Network Configuration Service

**Standard Care (high level of uptime):** Next Business Day Onsite Support, Maintenance Kit Replacement Service, Installation with Network Configuration Service

**Basic Care (minimum recommended support):** Next Business Day Onsite Support

**4 hr Onsite Support:** Onsite support within four hours after a service call received within the coverage window

**Next Business Day Onsite Support:** Onsite service the next business day after the service call is received

**Maintenance Kit Replacement Service:** Onsite replacement of your printer's maintenance kit including parts, materials, and labor

**Installation with Network Configuration Service:** Assembly, network configuration, and basic administrator familiarization

For more information about HP Care Pack, HP Contractual, or HP Managed Print Services, visit [hp.com/go/printservices](http://hp.com/go/printservices)



Windows 8



## Top Features

Stay ahead of schedule with this swift and versatile printer—up to 58 pages per minute (ppm).<sup>2</sup> Easily meet high-volume demands and provide flexible options for multiple users and paper sizes.

Business is mobile, and so is your workforce. Keep them covered—at their desk, on the way to the office, or stepping off a plane for an important meeting—with easy printing from mobile devices.<sup>1</sup>

Streamline fleet management—while giving workgroups the tools to support larger business initiatives. Extend print capabilities as business evolves, enhance security, and customize new solutions seamlessly.

Shrink your energy use while helping your company save money. This HP LaserJet Enterprise printer is designed for low energy consumption. Keep the printing process efficient and produce less waste.

### Product

E6B69A	HP LaserJet Enterprise M605n
E6B70A	HP LaserJet Enterprise M605dn
E6B71A	HP LaserJet Enterprise M605x

### Accessories

F2G68A	HP LaserJet 500-Sheet Input Tray Feeder
F2G69A	HP LaserJet Auto Duplexer Two Side Print
F2G70A	HP LaserJet Printer Stand
F2G71A	HP LaserJet 500-Sheet Stacker
F2G72A	HP LaserJet 500-Sheet Stacker Stapler
F2G73A	HP LaserJet 1,500-Sheet Input Tray
F2G74A	HP LaserJet 75-Sheet Envelope Feeder
F2G81A	HP LaserJet 500-Sheet 5-Bin Mailbox
B5L28A	HP Two Internal USB Ports
B5L29A	HP Secure High Performance Hard Disk Drive
G6W84A	HP 1GB 90-Pin DDR3 Slim DIMM
F5S62A	HP Trusted Platform Module
F2G75A	HP LaserJet Custom Media Cassette Accessory

### Supplies & Maintenance Kits<sup>3</sup>

CF281A	HP 81A Black Original LaserJet Toner Cartridge (~10,500 pages)
CF281X	HP 81X High Yield Black Original LaserJet Toner Cartridge (~25,000 pages)
F2G76A	HP LaserJet Printer 110V Maintenance Kit
F2G77A	HP LaserJet Printer 220V Maintenance Kit

### HP Care Packs

U8CR0E	HP 3-year Next Business Day + DMR LaserJet M605 Hardware Support
U8CR1E	HP 3-year 4h 9x5 + DMR LaserJet M605 Hardware Support
U8CR2E	HP 3-year 4h 13x5 + DMR LaserJet M605 Hardware Support
U8CR5E	HP 4-year Next Business Day + DMR LaserJet M605 Hardware Support
U8CR6E	HP 5-year Next Business Day + DMR LaserJet M605 Hardware Support
U8CS5E	HP 5-year 4h 13x5 + DMR LaserJet M605 Hardware Support
U8CS9E	HP 5-year 4h 9x5 + DMR LaserJet M605 Hardware Support
U8CT0E	HP 4-year 4h 9x5 + DMR LaserJet M605 Hardware Support
U8CT1E	HP 4-year 4h 13x5 + DMR LaserJet M605 Hardware Support
U8CT2E	HP 1-year Post Warranty 4h 9x5 + DMR LaserJet M605 Support
U8CT3E	HP 1-year Post Warranty 4h 13x5 + DMR LaserJet M605 Support
U8CT5E	HP 1-year Post Warranty Next Business Day + DMR LaserJet M605 Support
U8CT6E	HP 2-year Post Warranty Next Business Day + DMR LaserJet M605 Hardware Support

Protect your investment with HP Care Pack. Let HP certified engineers resolve your technical issues. For more details on HP Care Pack, go to [hp.com/go/cpc](http://hp.com/go/cpc)

### Paper

Contact HP via phone: Asia: 65 6253 8500

### Solutions

HP Web Jetadmin: [hp.com/go/wja](http://hp.com/go/wja)

HP Universal Print Driver: [hp.com/go/upd](http://hp.com/go/upd)

HP Imaging and Printing Security Center: [hp.com/go/ipsc](http://hp.com/go/ipsc)

HP LaserJet Fonts, Barcodes, and IPDS Emulation available at [hp.com/go/laserjetfonts](http://hp.com/go/laserjetfonts)

To learn more about available infrastructure, management, and workflow solutions, visit [hp.com/go/gsc](http://hp.com/go/gsc)

<sup>1</sup> Local printing requires mobile device and printer be on the same network or have a direct wireless connection. Wireless performance is dependent on physical environment and distance from access point. Wireless operations are compatible with 2.4 GHz operations only. Remote printing requires an Internet connection to an HP web-connected printer. App or software and HP ePrint account registration may also be required. Wireless broadband use requires separately purchased service contract for mobile devices. Check with service provider for coverage and availability in your area. See [hp.com/go/mobileprinting](http://hp.com/go/mobileprinting) for more details.

<sup>2</sup> Printing speed measured using ISO/IEC 24734 and excludes first set of test documents. For more information, see [hp.com/go/printerclaims](http://hp.com/go/printerclaims). Exact speed varies depending on the system configuration, software application, driver, and document complexity. <sup>3</sup> Declared yield value in accordance with ISO/IEC 19752 and continuous printing. Actual yields vary considerably based on images printed and other factors. For details see [hp.com/go/learnaboutequipment](http://hp.com/go/learnaboutequipment)

# HP LaserJet Enterprise M605 Series

Technical specifications	HP LaserJet Enterprise M605n (E6B69A)	HP LaserJet Enterprise M605dn (E6B70A)	HP LaserJet Enterprise M605x (E6B71A)
<b>Functions</b>	Print only		
<b>Print</b>			
Duplex print options	Manual (Automatic optional)	Automatic	
Print speed <sup>1</sup>	<b>Black (normal, A4):</b> Up to 55 ppm; <b>Black (normal, letter):</b> Up to 58 ppm		
First page out	<b>Black (A4, ready):</b> As fast as 7 sec; <b>Colour (A4, ready):</b> As fast as 7 sec		
Print technology	Laser		
Print resolution	<b>Black (best):</b> Up to 1200 x 1200 dpi; <b>Black (normal):</b> HP ImageREt 3600 (600 x 600 dpi)		
Print resolution technologies	HP ImageREt 3600 (600 x 600 dpi), HP ProRes 1200 (1200 x 1200 dpi)		
Print cartridges number	2 (black)		
Standard print languages	HP PCL 6, HP PCL 5e, HP Postscript Level 3 emulation, native PDF printing (v 1.7)		
Printer management	Printer Administrator Resource Kit (Driver Configuration Utility, Driver Deployment Utility, Managed Printing Administrator); HP Web JetAdmin Software; HP Proxy Agent Software; HP Imaging and Printing Security Center; HP Utility (Mac)		
<b>Connectivity</b>			
Standard connectivity	HP ePrint; Apple AirPrint™; Ethernet; USB		HP ePrint; Apple AirPrint™; USB; Wireless direct printing; Wireless (WiFi)
Mobile print capability <sup>2</sup>	HP ePrint, Apple AirPrint™		HP ePrint, Apple AirPrint™, Touch-to-Print, Wireless Direct Printing
Network ready	Standard (built-in Gigabit Ethernet)		
Network capabilities	Via HP Jetdirect Ethernet embedded print server (standard) supports: 10Base-T, 100Base-Tx, 1000Base-T; 802.3az (EEE) support on Fast Ethernet and Gigabit Ethernet; IPsec (standard)		Embedded NFC/HP Wireless Direct support
Wireless capability	Optional, enabled with purchase of a pending hardware accessory		Yes, embedded NFC/HP Wireless Direct support
<b>Memory</b>	512 MB standard (expandable to 1.5 GB through one 90-pin SDRAM slot)		
<b>Duty cycle<sup>3</sup></b>	Up to 225,000 pages; <b>Recommended monthly page volume<sup>4</sup>:</b> 5,000 to 16,000 pages		
<b>Processor speed</b>	1.2 GHz		
<b>Paper handling</b>			
Input <sup>5</sup>	100-sheet multipurpose tray 1, 500-sheet input tray 2; <b>Optional:</b> 500-sheet input tray, Custom media cassette (for tray 2 position only), 1,500-sheet High-capacity input tray (add up to 4 additional trays for up to 3,600-sheet input capacity), Automatic duplex for two-sided printing, 75-sheet envelope feeder	100-sheet multipurpose tray 1, 500-sheet input tray 2, Automatic duplex for two-sided printing; <b>Optional:</b> 500-sheet input tray, Custom media cassette (for tray 2 position only), 1,500-sheet High-capacity input tray (add up to 4 additional trays for up to 3,600-sheet input capacity), Automatic duplex for two-sided printing, 75-sheet envelope feeder	100-sheet multipurpose tray 1, 500-sheet input tray 2, 500-sheet input tray 3, Automatic duplex for two-sided printing; <b>Optional:</b> 500-sheet input tray, Custom media cassette (for tray 2 position only), 1,500-sheet High-capacity input tray (add up to 4 additional trays for up to 3,600-sheet input capacity), Automatic duplex for two-sided printing, 75-sheet envelope feeder
Output	500-sheet output bin; 100-sheet rear output bin; <b>Optional:</b> 500-sheet stacker, 500-sheet stapler-stacker, 500-sheet 5-bin mailbox		
Media type	Paper (bond, colour, letterhead, plain, preprinted, prepunched, recycled, rough, light), envelopes, labels, cardstock, transparencies, shelf edge labels, user-defined		
Media weight	<b>Multipurpose tray 1:</b> 60 to 200 g/m <sup>2</sup> ; <b>Tray 2, optional 500-sheet input tray, optional Custom media cassette, optional 1,500-sheet High-capacity input tray:</b> 60 to 120 g/m <sup>2</sup> ; <b>Optional Envelope feeder:</b> 75 to 105 g/m <sup>2</sup> ; <b>Optional Duplexer:</b> 60 to 120 g/m <sup>2</sup>		
Media sizes custom	<b>Multipurpose tray 1:</b> 76 x 127 to 216 x 356 mm; <b>Tray 2, optional 500-sheet input tray:</b> 148 x 210 to 216 x 356 mm; <b>Optional Custom media cassette:</b> 102 x 148 to 170 x 282 mm		
<b>Dimensions (W x D x H)</b>	425 x 451 x 399 mm (16.7 x 17.8 x 15.7 in)	425 x 451 x 399 mm (16.7 x 21.1 x 15.7 in)	425 x 537 x 521 mm (16.7 x 21.1 x 20.5 in)
<b>Weight</b>	22.6 kg (49.7 lb)	22.6 kg (57 lb)	32.5 kg (71.5 lb)
<b>What's in the box</b>	HP LaserJet M605n Printer; Pre-installed HP Black LaserJet Toner Cartridge; Installation guide, Support flyer; Printer documentation and software on CD-ROM; Power cord	HP LaserJet M605dn Printer; Pre-installed HP Black LaserJet Toner Cartridge; Pre-installed HP Duplexer; Installation guide, Support flyer; Printer documentation and software on CD-ROM; Power cord	HP LaserJet M605x Printer; Pre-installed HP Black LaserJet Toner Cartridge; Pre-installed HP Duplexer; Installation guide, Support flyer; Printer documentation and software on CD-ROM; Power cord
<b>Warranty features</b>	One-year return to bench <sup>7</sup>		
<b>Systems</b>			
Compatible operating systems	<b>Windows OS compatible with In-Box Driver:</b> Windows XP SP3 all 32-bit editions (XP Home, XP Pro, etc.), Windows Vista all (32-bit) editions (Home Basic, Premium, Professional, etc.), Windows 7 all (32-bit, 64-bit) editions; Windows 8/8.1 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets); Windows OS compatible with Universal Print Driver (From HP.com): Windows XP (SP3) (32-bit, 64-bit) editions (XP Home, XP Pro, etc.), Windows Vista all (32-bit, 64-bit) editions (Home Basic, Premium, Professional, etc.), Windows 7 all (32-bit, 64-bit) editions, Windows 8/8.1 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets); <b>Mac OS (HP Print Drivers available from HP.com and Apple Store):</b> OS X 10.7 Lion, OS X 10.8 Mountain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; Mobile OS (in-OS drivers): iOS, Android, Windows 8/8.1/10 RT; Linux OS (in-OS HPLIP): SUSE Linux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX		
Minimum system requirements	<b>PC:</b> Windows XP (SP3) all 32-bit editions (XP Home, XP Pro, etc.), Windows Vista all 32-bit editions (Home Basic, Premium, Professional, etc.), Windows 7 all 32-bit and 64-bit editions; Windows 8/8.1 all 32-bit and 64-bit editions (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit editions (excluding RT OS for Tablets); Windows OS compatible with Universal Print Driver (From HP.com); Windows XP (SP3) 32-bit and 64-bit editions (XP Home, XP Pro, etc.), Windows Vista all 32-bit and 64-bit editions (Home Basic, Premium, Professional, etc.), Windows 7 all 32-bit and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit editions (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit editions (excluding RT OS for Tablets); Mobile OS (in-OS drivers): Android, Windows 8/8.1/10 RT; Linux OS (in-OS HPLIP): SUSE Linux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; CD-ROM or DVD drive, or Internet connection; Dedicated USB or network connection or Wireless connection; 200 MB available hard disk space; OS compatible hardware (For OS hardware requirements see microsoft.com); <b>Mac:</b> Mac OS X 10.7 Lion, OS X 10.8 Mountain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; USB 1 GB available hard disk space; OS compatible hardware (For OS hardware requirements see apple.com)		
<b>Fonts and typefaces</b>	105 internal TrueType fonts scalable in HP PCL, 92 internal scalable fonts in HP postscript Level 3 emulation (Euro symbol built-in); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal Windows Vista 8 Fonts (Calibri, Cambria); additional font soions available via third-party flash memory cards; HP LaserJet Fonts and IPDS Emulation available at <a href="http://hp.com/go/laserjetfonts">hp.com/go/laserjetfonts</a>		
<b>Control panel</b>	4-line colour LCD display, 3 LED lights (Ready, Data, Attention), buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), 10-key numeric keypad	4.3-in touch screen, LCD (colour graphics); 1 Home button	
<b>Power</b>	<b>Power supply type:</b> Internal (Built-in) power supply; <b>Power supply required:</b> 110-volt input voltage: 100 to 127 VAC (+/- 10%), 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, product varies by part number with # Option code identifier); <b>Power consumption:</b> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual Off), 0.7 watts (Auto-Off/Wake on LAN), <0.1 watts (Auto-Off/Manual On)		
<b>Software included</b>	<b>Windows OS:</b> HP Software Installer/Uninstaller, HP PCL 6 Printer Driver, HP Device Experience (DXP), HP Update, Product Registration Assist, HP Web Services Assist (HP Connected), Online user manuals; <b>Mac OS:</b> Welcome Screen, (Directs users to HP.com or OS App Source for LaserJet Software), Setup Scan To Folder and Email		
<b>Acoustic</b>	<b>Acoustic power emissions<sup>6</sup>:</b> 7.1 B(A); <b>Acoustic power emissions (ready):</b> 4.2 B(A); <b>Acoustic pressure emissions bystander (active, printing):</b> 56 dB(A); <b>Acoustic pressure emissions bystander (ready):</b> 27 dB(A)		
<b>Environmental ranges</b>	<b>Operating temperature range:</b> 15 to 32° C (59 to 89.6° F); <b>Recommended operating temperature:</b> 15 to 32° C (59 to 89.6° F); <b>Non-operating humidity range:</b> 10 to 90% RH; <b>Operating humidity range:</b> 10 to 80% RH; <b>Recommended operating humidity range:</b> 10 to 80% RH		
<b>Security management</b>	Identity management: Kerberos authentication, LDAP authentication, 1000 user PIN codes, optional HP and 3rd party advanced authentication solutions (e.g., badge readers); Network: IPsec/firewall with Certificate, Pre-Shared Key, and Kerberos authentication, Supports WJA-10 IPsec configuration Plug-in, 802.1X authentication (EAP-PEAP, EAP-TLS), SNMPv3, HTTPS, Certificates, Access Control List; Data: Storage Encryption, Encrypted PDF & Email (uses FIPS 140 validated cryptographic libraries from Microsoft), Secure Erase, SSL/TLS (HTTPS), Encrypted Credentials; Device: Security lock slot, USB port disablement, hardware integration pocket for security solutions; Security management: Compatible with HP Imaging and Printing Security Center		
<b>Safety approvals and requirements</b>	IEC 60950-1:2005 + A1:2009 + A2:2013 (International); EN 60950-1:2006 + A1:2010 + A11:2009 + A12:2011 + A2:2013 (EU); IEC 60825-1; UL/CUL Listed (US/Canada); GS License (Europe); EN 60825-1 (Class 1 Laser/LED Device); Low Voltage Directive 2006/95/EC with CE Marking (Europe); other safety approvals as required by individual countries		
<b>Supported network protocols</b>	IPv4/IPv6: Apple Bonjour Compatible (Mac OS 10.2.4 or higher), SNMPv1/v2c/v3, HTTP, HTTPS, FTP, TFTP, Port 9100, LPD, WS Discovery, IPP, Secure-IPP, IPsec/Firewall; IPv6: DHCPv6, MLDv1, ICMPv6; IPv4: Auto-IP, SLIP, Telnet, IGMPv2, BOOTP/DHCP, WINS, IP Direct Mode, WS Print; Other: NetWare NDS, Bindery, NDPS, iPrint		

<sup>1</sup> Measured using ISO/IEC 24734, excludes first set of test documents. For more information see [hp.com/go/printerclaims](http://hp.com/go/printerclaims). Exact speed varies depending on the system configuration, software application, driver, and document complexity.  
<sup>2</sup> May require a firmware upgrade to be compatible, download at [hp.com/go/support](http://hp.com/go/support).  
<sup>3</sup> Duty cycle is defined as the maximum number of pages per month of imaged output. This value provides a comparison of product robustness in relation to other HP LaserJet or HP Color LaserJet devices, and enables appropriate deployment of printers and MFPS to satisfy the demands of connected individuals or groups.  
<sup>4</sup> HP recommends that the number of printed pages per month be within the stated range for optimum device performance, based on factors including supplies replacement intervals and device life over an extended warranty period.  
<sup>5</sup> Power requirements are based on the country/region where the printer is sold. Do not convert operating voltages. This will damage the printer and void the product warranty.  
<sup>6</sup> Acoustic values are subject to change. For current information see [hp.com/support](http://hp.com/support). Configuration tested: M605x, simplex printing, A4 paper at an average of 56 ppm.  
<sup>7</sup> Warranty terms vary from country to country. Paper handling accessories are offered separately and with an additional cost. To insure product stability, it is a requirement to purchase the HP LaserJet Printer Stand (F2G70A) when using M605 Printer with more than three HP LaserJet 500-sheet Input Feeders (CE998A), or with one HP LaserJet 1,500-sheet Input Tray (CE398A) and more than one HP LaserJet 500-sheet Input Tray Feeder (CE998A).

## To learn more, visit [hp.com](http://hp.com)

© Copyright 2015 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

ENERGY STAR and the ENERGY STAR logo are registered U.S. marks. Microsoft and Windows are registered trademarks of Microsoft Corporation. AirPrint and the AirPrint logo are trademarks of Apple Inc., registered in the U.S. and other countries. Linux is a U.S. registered trademark of Linus Torvalds. UNIX is a registered trademark of The Open Group. NetWare® is a trademark of Novell, Inc.

